




Freighter Conversion Data Sheet

The Aeronautical Engineers Inc. (AEI) MD-80SF Cargo Conversion consists of the installation of a 86"x136" cargo door on the left side of the fuselage, and modification of main deck to a Class E cargo compartment. After conversion the aircraft can carry twelve 88"x108" or eight 125"x88" ULDs or eight 125"x96" ULDs. This is the world's first MD-80 passenger to freighter conversion.

AEI's cargo door has earned a reputation of being the most robust and reliable in the conversion industry. The cargo door is hydraulically operated and actuated from the inside of the aircraft by an independent system. Hydraulic pressure is available from two sources; an electrically operated hydraulic pump or a manual hand pump. The door control and manual pump are located on the 9g barrier, allowing a single person to operate the door manually.

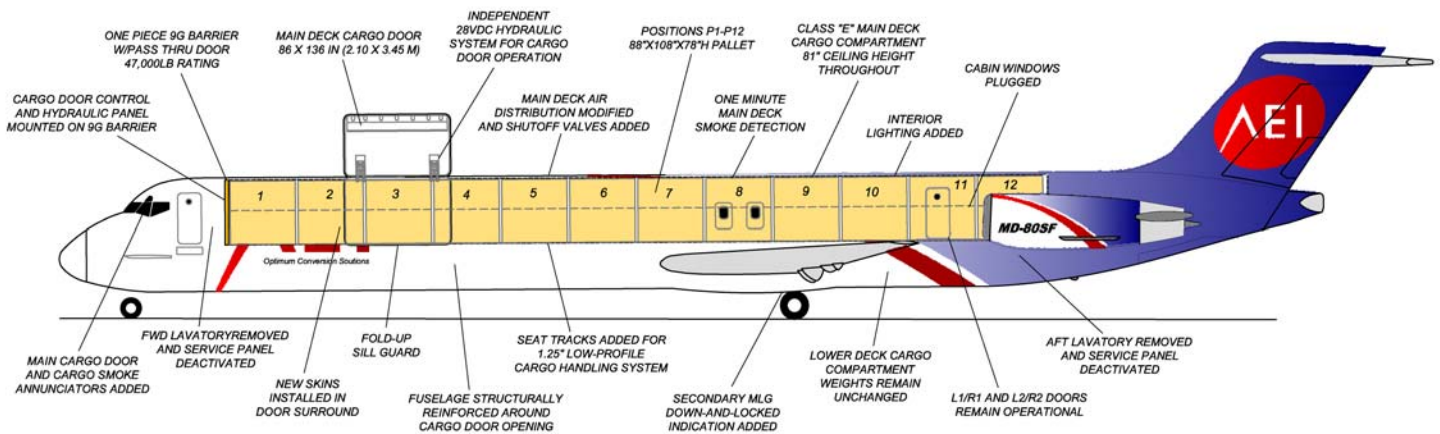

BOEING Licensed
3rd Party STC Provider

STC
Available
1st Qtr
2012

Approvals
United States FAA
Pending

European EASA
Pending

Chinese CAAC
Pending



Freighter Weights and Volumes

	MD-81SF, MD-82SF, MD-88SF	MD-83SF
MTW*	Up to 150,000 LB Max (68,038 kg)	Up to 160,500 LB Max (72,802 kg)
MTOW*	Up to 149,500 LB Max (67,812 kg)	Up to 160,000 LB Max (72,575 kg)
MZFW*	Up to 122,000 LB Max (55,338 kg)	Up to 122,000 LB Max (55,338 kg)
MLW*	Up to 130,000 LB Max (58,967 kg)	Up to 139,500 LB Max (63,276 kg)
BEW**	74,024 LB (33,576 kg)	75,320 LB (34,164 kg)
Payload***	Up to 47,000 LB Max (21,319 kg)	Up to 46,680 LB Max (20,238 kg)
Fuel Capacity	5,846 USG (22,129 L)	5,846 USG (22,129 L)

*Aircraft as-delivered weights
**Typical BEW after conversion, depends on original aircraft configuration
***Typical Max Payload, depends on aircraft OEW and MZFW


Main Deck Usage Volume	
12 ULD's - 88"L X 108"W X 78"H	4,536 Ft³ (128.4 m ³)
8 ULD's - 88"W X 125"L X 78"H	3,683 FT³ (104.2 m ³)

Main Attributes*


- 12 position 88"x108" Container or Netted Pallet
- 8 position 125" x 88" ULD's longitudinally oriented
- 8 position 125" x 96" ULD's longitudinally oriented
- 4,000-5,000 lb average position weight limit
- Up to 47,000 lbs useful main deck payload
- 86"x136" Main Deck Cargo door, "estimated size"
- 9g rigid cargo / smoke barrier with door, Ventura Aerospace
- Low profile, 1.25" Ancra Cargo Loading System
- Minimal floor reinforcement required
- Main deck converted to Class "E" Cargo Compartment, with independent smoke detection system
- Cabin windows replaced with lightweight aluminum window plugs
- High reliability, independent hydraulic system
- Up to 2 Supernumerary Seats

*Preliminary Specifications, subject to change.

12 POSITION 88"L X 108"W X 78"H CONTAINER/PALLETS

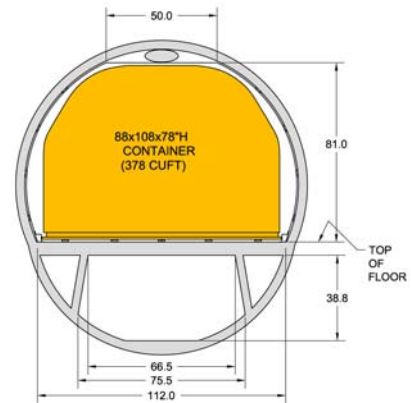

8 POSITION 88"W X 125"L X 78"H NETTED PALLETS

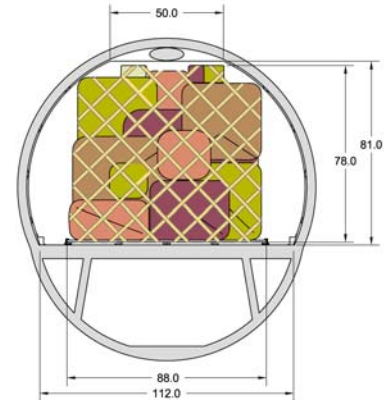

Aeronautical Engineers, Inc.

Corporate Headquarters
7765 NW 54 Street
Miami, FL 33166

Phone: 1.305.594.5802
Fax: 1.305.594.5804

Sales & Marketing
Robert T. Convey
Vice President Sales & Marketing
2945 Townsgate Road
Suite 200
Westlake Village, CA 91361
Cell Phone: 1.818.406.3666

Email:
rconvey@aeronautical-engineers.com
sales@aeronautical-engineers.com
engineering@aeronautical-engineers.com

Web:
www.aeronautical-engineers.com